


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

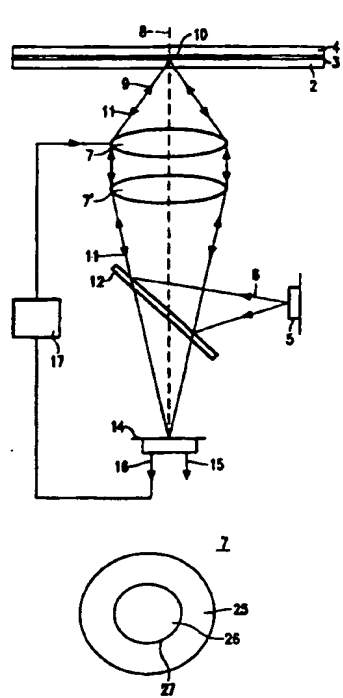

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G11B 7/135, G02B 13/18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/33277 (43) International Publication Date: 12 September 1997 (12.09.97)</p>
<p>(21) International Application Number: PCT/IB97/00174 (22) International Filing Date: 25 February 1997 (25.02.97) (30) Priority Data: PCT/IB96/00182 8 March 1996 (08.03.96) WO (34) Countries for which the regional or international application was filed: AT et al. 96201888.3 5 July 1996 (05.07.96) EP (34) Countries for which the regional or international application was filed: AT et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kotbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: OPHEIJ, Willem, Gerard; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BRAAT, Josephus, Johannes, Maria; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: VISSER, Derk; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).</p>		<p>(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>
<p>(54) Title: OBJECTIVE LENS AND SCANNING DEVICE USING SUCH AN OBJECTIVE LENS (57) Abstract A scanning device for optical record carriers is provided with an objective lens (7) suitable for scanning record carriers (1, 21) having a transparent substrate (2, 23) of different thicknesses. The lens comprises an outer annular part (25) and an inner central part (26) within the annular part. Only the central part of the lens is used for forming a focus through a first substrate (2) having a first thickness. The central part is corrected for the spherical aberration of the first substrate. The annular and central part of the lens are used for forming a focus through a second substrate (23) having a different, second thickness. The annular part is corrected for the spherical aberration of the second substrate. The diagram illustrates the scanning device and the objective lens. The top part shows a side view of the scanning device where an objective lens (7) focuses light through a transparent substrate (2) onto a record carrier (1). The lens (7) is composed of an outer annular part (25) and an inner central part (26). The record carrier (1) has a transparent substrate (2) and a recording layer (3). The bottom part shows a cross-section of the objective lens (7) with the annular part (25) and central part (26) clearly defined. The lens is shown focusing light through a substrate (2) onto a record carrier (1) which has a transparent substrate (23) and a recording layer (24). The diagram is labeled with various numbers: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 21, 23, 24, 25, 26, 27.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Objective lens and scanning device using such an objective lens

The invention relates to an objective lens for focusing a radiation beam to a first focus through a first transparent layer having a first thickness and to a second focus through a second transparent layer having a different second thickness. The invention also relates to an optical scanning device for scanning a first type of record carrier having a first information plane and a first transparent layer of a first thickness and for scanning a second type of record carrier having a second information plane and a second transparent layer of a second thickness different from the first thickness, comprising a radiation source for generating a radiation beam and an objective lens for converging the radiation beam through the first transparent layer to a first focus on the first information layer and for converging the radiation beam through the second transparent layer to a second focus on the second information layer. The scanning includes writing, reading and/or erasing information in the record carrier.

The transparent layer in optical record carriers has, in general, the function of protecting the information layer from environmental influences and providing mechanical support for the record carrier, i.e. it acts as a substrate for the information layer. The thickness of the transparent layer is a compromise between the desired stiffness of the record carrier and the numerical aperture of the radiation beam used for scanning the information layer. If for a new type of record carrier the numerical aperture is increased in order to increase the storage density of the information layer, it is often necessary to reduce the thickness of the transparent layer in order to reduce the influence of disc tilt on the quality of the radiation beam. As a consequence, there will be different types of record carrier on the market, having different thicknesses of the transparent layer. A compatible record player should be able to scan the different types of record carrier, irrespective of the thickness of the transparent layer.

The transparent layer, through which a radiation beam scans the information layer, introduces a so-called spherical aberration in the radiation beam. The spherical aberration is compensated in the objective lens, making the radiation beam near its focus substantially free from spherical aberration. If an objective lens compensated for a first thickness of the transparent layer is used for scanning a record carrier with a transparent

layer of a second, different thickness, the quality of the focus will be deteriorated due to the under- or over-compensated spherical aberration.

The not-prepublished international patent application IB96/00182 describes a device for scanning optical record carriers of the first and second type. This device uses an objective lens designed for converging a radiation beam through the first transparent layer to a best focus on the first information layer. When scanning a record carrier of the second type, the objective lens forms a paraxial focus on the second information layer. The best focus of a beam is the point along the axis of the beam which has the highest intensity. The paraxial focus of a beam is the point along the axis of the beam through or towards which the paraxial rays of the beam are converged. The radiation reflected from the record carrier is detected by a radiation-sensitive detection system. When scanning a record carrier of the first type, the detection system uses all radiation in the reflected beam. When scanning a record carrier of the second type, the detection system detects only radiation from a central area of the cross section of the radiation beam. Since the objective lens is not designed for converging a radiation beam through the thickness of the second transparent layer, the radiation beam will incur uncorrected spherical aberration on passage through the second transparent layer. By restricting the detection to the central rays of the beam, the highly aberrated rays in the outer annular area of the beam will then have a reduced influence on the output signals of the detection system.

According to the invention the objective lens converges a radiation beam to a single best focus, the objective lens having an outer annular part which introduces a first spherical aberration in the radiation beam compensating for passage of the radiation beam through a first transparent layer having a first thickness, and a central part inside the annular part which introduces a second spherical aberration in the radiation beam compensating for passage of the radiation beam through a second transparent layer having a different, second thickness. In general, the annular part and the central part are concentric; the parts may be adjacent or be separated by an intermediate ring-shaped area.

When the objective lens converges a radiation beam through the second transparent layer, the rays of the beam passing through the central part form a second focus, the rays being corrected for the spherical aberration incurred in passing the second transparent layer. When the objective lens converges a radiation beam through the first transparent layer, the beam passing through the combined area of the annular part and the central part forms a first focus. In that case only the rays passing through the annular part are corrected for the spherical aberration incurred in passing the first transparent layer,

whereas the rays passing through the central part are corrected for the spherical aberration incurred in passing the second transparent layer. The invention rests on the insight that the correction of the central part of the objective lens for a thickness of the transparent layer different from the thickness of the transparent layer for which the annular part is corrected has only a relatively small influence on the quality of the first focus.

It is remarked that the European patent application nr. 0 610 055 discloses an objective lens combined with a hologram or grating. The lens is corrected over its entire area for the passage of radiation through a first transparent layer thickness towards a first focus. The grating diffracts part of the radiation in a central area of the incoming radiation beam into a sub-beam which, after refraction by the lens, is corrected for passage through a second transparent layer thickness towards a second focus. The objective lens and grating converges the incident radiation beam to an outgoing beam comprising two sub-beams having different vergences. Hence, the combination of the objective lens and the grating forms two best foci. In contrast, the objective lens according to the invention converges the radiation beam to a beam having a single vergence and forms a single best focus. When the objective lens according to the invention is of a refractive-only type, a reflective-only type or a refractive-reflective-only type, it passes substantially all energy of the incident radiation beam to the first focus, and does not branch off part of the energy to a sub-beam forming the second focus. The phrase 'substantially all energy of the radiation beam' means that only normal losses due to reflections on transitions from one medium into another one, due to absorption within media, and due to opaque parts of the lens are disregarded.

Special embodiments of the objective lens are given in Claims 2, 3 and 4.

A further aspect of the invention relates to an optical scanning device using an objective lens according to the invention. The scanning device is suitable for scanning a first type of record carrier having a first information plane and a first transparent layer of a first thickness and for scanning a second type of record carrier having a second information plane and a second transparent layer of a second thickness different from the first thickness. The scanning device comprises a radiation source for generating a radiation beam and an objective lens for converging the radiation beam through one of the transparent layers to a single best focus, and in which an outer annular part of the objective lens introduces a first spherical aberration compensating for passage of the radiation beam through the first transparent layer and a central part inside the annular part introduces a second spherical aberration compensating for passage of the radiation beam through the second transparent layer.

When scanning a record carrier of the second type, the part of the beam passing through the central part is well corrected for the thickness of the transparent layer of the record carrier. The improved correction of the central rays of the reflected beam results in an improved quality of the output signals of the detection system when scanning a record carrier of the second type. The invention rests on the insight that, when scanning a record carrier of the first type, the effect of the correction of the central part of the objective lens for a thickness of the transparent layer different from that of the layer through which is presently being scanned has a negligible effect on the output signals of the detection system.

10 The invention will now be described in greater detail by way of example with reference to the accompanying drawings in which

Figure 1A shows a scanning device according to the invention scanning a record carrier of the first type;

Figure 1B shows a record carrier of the second type;

15 Figure 2A shows a view of the objective lens according to the invention along its optical axis;

Figure 2B shows an objective lens according to the invention provided with an opaque ring;

20 Figure 3A shows a cross-section of a first embodiment of the objective lens;

Figure 3B shows a cross-section of a third embodiment of the objective lens; and

Figure 4 shows a detection system of the scanning device.

25 Figure 1A shows a device for scanning an optical record carrier 1. The record carrier comprises a transparent layer 2, on one side of which an information layer 3 is arranged. The side of the information layer facing away from the transparent layer is protected from environmental influences by a protection layer 4. The transparent layer 2 acts as a substrate for the record carrier by providing mechanical support for the information layer. Alternatively, the transparent layer may have the sole function of protecting the information layer, while the mechanical support is provided by a layer on the other side of the information layer, for instance by the protection layer 4 or by a further transparent layer and information layer connected to the information layer 3. Information may be stored in the record carrier in the form of optically detectable marks arranged in substantially parallel,

30

concentric or spiral tracks in the information layer 3, not indicated in the Figure. The marks may be in any optically readable form, e.g. in the form of pits, areas with a reflection coefficient or a direction of magnetization different from their surroundings, or a combination of these forms.

5 The scanning device comprises a radiation source 5, for example a semiconductor laser, emitting a diverging radiation beam 6. A beam splitter 12, for example a semi-transparent plate, reflects the radiation towards a collimator lens 7' forming a collimated beam, which is incident on a single-focus objective lens 7. The collimator lens and the objective lens may be combined in a single objective lens. The combined collimator-
10 objective lens 7'-7 having an optical axis 8 transforms the radiation beam 6 to a converging beam 9, having a single vergence, which forms a focus 10 on the information layer 3. Although the objective lens is indicated in the Figure as a single lens element, it may also comprise a hologram operating in transmission or reflection, or a grating for coupling radiation out of a waveguide carrying the radiation beam. Radiation of the converging beam
15 9 reflected by the information layer 3 and forming a reflected beam 11, returns on the optical path of the forward converging beam 9. After the objective lens 7 and collimator lens 7', the beam splitter 12 separates the forward and reflected beams by transmitting at least part of the reflected beam 11 towards a detection system 14. The detection system captures the radiation and converts it into one or more electrical signals. One of these signals is an information
20 signal 15, the value of which represents the information read from the information layer 3. Another signal is a focus error signal 16, the value of which represents the axial difference in height between the focus 10 and the information layer 3. The focus error signal is used as input for a focus servo controller 17, which controls the axial position of the objective lens 7, thereby controlling the axial position of the focus 10 such that the focus substantially
25 coincides with the plane of the information layer 3. The part of the detection system, including one or more radiation-sensitive detection elements and an electronic circuit processing the output signal of the detection elements, used for generating the focus error is called the focus error detection system. The focus servo system for positioning the objective lens comprises the focus error detection system, the focus servo controller and an actuator
30 for moving the objective lens.

Figure 2A shows a view of the objective lens 7 along its optical axis. The lens comprises an annular outer part 25 and a central part 26 inside the annular part. The central part and the annular outer part may have a common boundary line 27, as shown in the Figure, or they may be separated by an intermediate ring.

The objective lens 7 has been designed to form a best focus on the information layer 3, i.e. a focus with a Strehl ratio approaching 1. For this reason the objective lens 7 has been corrected for the spherical aberration incurred by the converging beam 9 when passing the transparent layer 2 of the record carrier 1. The wavefront of the converging beam close to the focus 10 is substantially spherical. Figure 1B shows a record carrier 21 of another type having an information layer 23 and a transparent layer 22 of a thickness different from the thickness of the transparent layer 2. The information layer 23 may be scanned properly by means of the converging beam 9 when the information layer is arranged axially not at the position of the best focus but near or at the position of the paraxial focus of the converging beam 9.

When the information layer 23 is positioned at an axial location away from the paraxial focus, the quality of the focal spot reduces rapidly, leading to a reduced quality of the signals generated in the detection system 14. In a small range around the position of the paraxial focus the wavefront of the aberrated converging beam is substantially spherical in a central part of the aperture. The focus comprises a small, central region of high intensity resulting from rays in the central part of the aperture, and a large region of low intensity surrounding the small region and resulting from rays outside the central part. The quality of the central region of the focus is then sufficient for properly scanning the information layer 23, while the outer region can be made not to affect the scanning.

When scanning the information layer 23 of record carrier 21 with the paraxial focus, the central part of the wavefront is relatively flat, but the outer part of the wavefront is strongly deviated. The deviation changes the direction of the marginal rays, making it possible to intercept the marginal rays before detection, and thereby removing a major part of the disturbing influence of the uncompensated spherical aberration from the signals generated by the detection system.

The sizes of the central part and of the annular part depend amongst others on the numerical aperture of the objective lens 7, the difference between the first and second thickness of the transparent layers 2 and 22 respectively and their refractive indices. The determination of the optimum size of the central part and its tolerance have been described in said international patent application IB96/00182, more specifically in the paragraphs explaining equation (1) of that application and equation (2b) giving a preferred embodiment. As an example, a device is designed to scan a record carrier of the first type having a transparent layer thickness of 0.6 mm with a radiation beam of wavelength $\lambda = 635$ nm and $NA_0 = 0.60$, NA_0 being the numerical aperture of the entire radiation beam 9. The

device must also be able to scan a record carrier of the second type having a transparent layer thickness of 1.2 mm ($\Delta d=0.6$ mm), refractive index of 1.58 and smallest details in the form of a track pitch having $p=1.6$ μm . The optimum value of NA_c , i.e. the numerical aperture pertaining to the central part, is 0.33. Since the value of NA_c over NA_0 is equal to
5 0.33/0.60=0.55, the diameter of the central part 26 is also equal 0.55 times the diameter of the entire cross-section of the reflected beam 11 at the position of the objective lens. The tolerance on the value of NA_c and the size of the central part is relatively large because of the counteracting effects of on the one hand spherical aberration which increases the spot size with increasing aperture and on the other hand diffraction which decreases the spot size with
10 increasing numerical aperture. For low performance devices the tolerance is ± 25 % and for high-performance devices the tolerance is preferably equal to ± 10 %.

Figure 3A shows an embodiment of the objective lens 7 according to the invention designed for converging a collimated beam of radiation with an NA of 0.6 to a focus through the transparent layer 2 made of Polycarbonate (PC) having a thickness of 0.6
15 mm and a refractive index of 1.58 at the design wavelength of 650 nm. The objective lens comprises a spherical-flat glass body 28 and a transparent layer 29 of Diacryl having a refractive index of 1.566 giving both the annular part and the central part of the lens an aspherical outer surface 30. The transparent layer 29 may be applied to the glass body 28 by the replication technique known from inter alia European patent nr. 0 156 430. The annular
20 part, having an inner radius of 1.089 mm, introduces an amount of spherical aberration compensating for a passage of the converging radiation beam 9 through the 0.6 mm PC transparent layer. The central part of the lens, inside the annular part, introduces a spherical aberration in the radiation beam compensating for a passage through a 1.2 mm PC transparent layer. The quality of the objective lens is further improved by making the
25 effective focal lengths of the central part and the annular part substantially equal, so that radiation passing through the central part constructively contributes to radiation passing through the annular part, together forming the first focus. The scanning through the 0.6 mm layer is improved by choosing the thickness of the central part such that the RMS wavefront deviation of the radiation beam near the first focus, i.e. after passing through the 0.6 mm
30 layer, has a minimum value. This entails making the average wavefront deviation in the central part equal to the average wavefront deviation in the annular part. The wavefront correction due to the thickness correction is of the order of 0.1λ with respect to a central part having only a 4th degree compensation for spherical aberration and a 2nd degree correction for focus. The thickness correction amounts to about 0.2λ in terms of material

thickness of the lens. The thickness correction is an additional measure without which scanning through the 0.6 mm layer is also possible.

The data of the first embodiment of the lens are:

	focal length	3.30 mm
5	thickness on the optical axis	1.85 mm
	refractive index of body 28	1.6991
	optical diameter	3.96 mm
	radius of curvature (R) of the body	2.516 mm
	free working distance	1.82 mm
10	thickness variation of layer 29	24 μm at $y=0.00$ mm 0.6 μm at $y=1.30$ mm 44 μm at $y=1.98$ mm.

The shape of the outer surface 30 of the annular part 25 is given by the polynomial

15

$$(1) \quad z = \sum_{n=1}^{n=5} a_{2n} y^{2n}$$

where $a_2=0.22111850$, $a_4=0.00406762$, $a_6=-0.00001517$, $a_8=-0.00000514$ and $a_{10}=-0.00000348$. The annular part 25 extends from $y=0.55 \cdot 1.98 = 1.089$ mm to $y=1.98$

20 mm.

The shape of the outer surface 30 of the central part 26 is given by $z+\Delta z$, whereby z is given by equation (1) and Δz by

$$(2) \quad \Delta z = 0.63 \cdot 10^{-3} \left[\left(\frac{y}{y_{\max}} \right)^4 - \left(\frac{y}{y_{\max}} \right)^2 + 0.16667 \right]$$

25

where $y_{\max} = 1.089$ mm. The term Δz comprises a Zernike polynomial giving a focus correction appropriate for the spherical aberration the term introduces into the radiation beam. The quadratic term in the polynomial is the correction of the focal length and the constant term is the thickness correction.

When the objective lens comprises only the spherical aberration compensation in its central part, the preferred position of the information layer 23 is at the paraxial focus of the lens. When the objective lens comprises both the spherical aberration compensation and the focus correction, the preferred position of the information layer 23 is a short distance away from the paraxial focus towards the best focus in order to minimize the wavefront deviation. The short distance is about two focal depths of the beam passing through the central part 26, i.e. of a beam having a numerical aperture of NA_c . The focal depth is equal to $\lambda/[2(NA_c)^2]$. When for example the wavelength λ is equal to 650 nm and NA_c is equal to 0.33, the short distance is equal to 6 μm . Any reference to the position of the paraxial focus herein below is supposed to be a reference to the preferred position.

In general, a focus is correctly positioned on an information plane if the focus error signal 16 has a zero value. When in a scanning device having an objective lens according to the above first embodiment the focus servo system has been adjusted such that the first focus located on the first information layer 3 is at a zero-crossing of the focus error signal, the second focus is in general not accurately located on the information layer 23 at the zero-crossing of the focus error signal. This can be remedied by adding a constant focus offset voltage to the focus error signal 16 when scanning a record carrier of the second type. The drawback of an offset voltage dependent on the type of record carrier being scanned can be overcome by modifying the objective lens. Thereto a focus correction is added to the central part of the objective lens, giving the central part a focus correction different from the correction appropriate for the spherical aberration it introduces in the beam. The extra focus correction takes care that the second focus is located on the second information layer at a zero-crossing of the focus error signal. The magnitude of the extra focus correction is of the order of a focal depth of the objective lens, i.e. of the order of 1 μm , and may depend on the geometry of the focus error detection system. The record-carrier-dependent additional focus offset voltage is then no longer necessary.

A second embodiment of the objective lens according to the invention incorporating the above-mentioned extra focus correction has a cross-section similar to the cross-section of the first embodiment shown in Figure 3A and may be also be made using the replication technique. The shape of the outer surface of the annular part is the same as in the first embodiment and are given by the above equation (1) and the values of the constants given directly below the equation. The shape of the outer surface of the central part is given by $z + \Delta z'$, whereby z is given by equation (1) and $\Delta z'$ by

$$(3) \quad \Delta z' = 0.63 * 10^{-3} \left[\left(\frac{y}{y_{\max}} \right)^4 - 1.13 \left(\frac{y}{y_{\max}} \right)^2 + 0.23 \right]$$

A third embodiment of the objective lens according to the invention is a biaspheric lens 32 made of a single plastic material for instance by injection moulding.

- 5 Figure 3B shows a cross-section of the lens 32. The material of the lens is Polymethylmethacrylate (PMMA) having a refractive index of 1.4885 at the design wavelength of 650 nm.

The data of the third embodiment of the lens are:

	focal length	3.30 mm
10	thickness on the optical axis	2.95 mm
	optical diameter	3.96 mm
	free working distance	1.5 mm.

- The lens has two surfaces 33 and 34, the first one facing the radiation source, the second one facing the record carrier 1. The shape of the surface 33 in the annular part of the lens is given by the polynomial for z in equation (1) in which the constants have the values: $a_2=0.25317630$, $a_4=0.00671352$, $a_6=0.00045753$, $a_8=-0.00010526$ and $a_{10}=0.00000860$. The annular part extends from $y=1.089$ mm to $y=1.98$ mm. The shape of the surface 33 in the central part is given by $z+\Delta z$, whereby z is given by equation (1) and the constants given in the previous sentence and Δz is given by equation (2) with the factor 0.63 replaced by 0.73.

The shape of the surface 34 over the width of the radiation beam is given by equation (1) in which the constants have the values: $a_2=-0.10009614$, $a_4=0.02163729$, $a_6=-0.00788082$, $a_8=0.00205921$ and $a_{10}=-0.00023477$.

- A fourth embodiment of the objective lens according to the invention is a lens as shown in Figure 3B which has the same shape of the surfaces 33 and 34, but where the shape of the central part is not given by $z+\Delta z$ but by $z+\Delta z'$, in which $\Delta z'$ is given by equation (3) with the factor 0.63 replaced by 0.73. This lens has the extra focus correction comparable to the second embodiment.

- It will be clear that similar embodiments of the objective lens according to the invention are possible when the objective lens 7 and the collimator lens 7' are combined in a single optical element. Whereas the above embodiments have one finite conjugate, such

a single optical element has two finite conjugates.

As stated above, the marginal rays of the radiation beam 11 must be intercepted before detection when scanning a record carrier of the second type. Rays in the central region of the radiation beam 11 will be converged properly towards the detection system 14, whereas the marginal rays of the radiation beam 11 have such a large angular deviation due to the spherical aberration, that they will not be intercepted by the detection system 14. However, rays in an intermediate region between the central region of the beam and the marginal rays will still be incident on the detection system although these rays do not have the proper spherical aberration correction for the first type of record carrier, thereby lowering the quality of the detection signals formed by the detection system.

This problem can be solved by providing the scanning device with an opaque ring, which may be arranged on the objective lens. The word 'opaque' means that light incident on the ring does not follow the path it would have followed in the absence of the ring, i.e. such light does not fall on the detection system anymore. The ring forms a solution for the same problem as the extra focus correction of the second and fourth embodiment of the objective lens. Hence, a scanning device having a ring does not require a record-carrier-dependent additional offset voltage in the focus servo system.

Figure 2B shows an objective system 35 having such an opaque ring. An annular part 36 and a central part 37 are separated by an intermediate ring 38. The shape of the annular part and the central part may be according to the first or third embodiment described above. The inner circle of the ring 35 is preferably located at the position of the boundary line 27 of the embodiment of the lens shown in Figure 2A with a tolerance of $\pm 10\%$ of the radius of the entire cross-section of the radiation beam at the location of the ring. The width of the ring depends amongst others on the geometry of the detection system 14. A wide ring effectively removes unwanted rays from the detection system, whereas a small ring has a higher throughput of radiation. As a compromise, a ring arranged in the forward and reflected radiation beam has preferably a width between 5% and 25% of the mentioned radius and has an optimum width of 10%.

The ring may have several embodiments. It may comprise one or more deep 'V' grooves or hills which refract the incident light on the ring in directions where they hardly or not at all affect the detection signals anymore. The ring may also comprise a series of small, shallow pits or grooves operating as a grating which diffracts the incident light away from the ongoing beam. Such a grating can easily be applied to a lens made up of a glass body and a transparent layer covering one or both sides of the body and to a plastic

lens. The ring may comprise a reflective thin film coating for reflecting light incident on the ring. The ring may also comprise an absorbing layer such as ink to absorb incident light. The ring may comprise $2(2n+1)$ sections of equal length, where $n=0, 1, 2, \dots$, and sections are alternately transparent and opaque. Such a ring, operating on the way forth and back, forms an effective obstruction for radiation incident on the ring, and at the same time has the advantage that it passes more radiation diffracted in higher orders by the record carrier than a uniformly opaque ring.

Each of these rings may be arranged on either side of an objective lens having one finite conjugate or of an objective lens having two finite conjugates. The ring may also be arranged on the beam splitter 12 in Figure 1 such that it does not interact with the radiation beam 6 from the laser 5 but only with the reflected radiation beam 11. When using a semi-transparent plate as beam splitter, as shown in Figure 1, the ring may be applied to the side of the plate directed towards the detection system 14. When the ring is arranged only in the reflected beam 11, the ring is preferably wider than the ring arranged on the lens, and runs preferably from 55% to 75% of the radius of the reflected beam at the location of the ring with a tolerance of $\pm 5\%$ of the mentioned radius. This arrangement yields a more robust read-out of information when a record carrier of the first type is tilted.

Figure 4 shows an embodiment of the detection system 14. The detection system comprises a quadrant detector having four radiation-sensitive detection elements 39, 40, 41 and 42. The radiation beam 11 incident on these elements has been made astigmatic, for instance by the passage through the oblique plate 12 shown in Figure 1. The four electric output signals of the detection elements may be used to form a focus error signal according to the so-called astigmatic method, known from inter alia US 4 358 200. On the one hand, the size of the elements must be large enough to capture most of the radiation beam when scanning a record carrier of the first type. On the other hand, the size must be sufficiently small not to intercept the marginal rays when scanning a record carrier of the second type. The compromise size of the elements depends on the wavelength of the radiation, the numerical aperture NA_D of the objective lens on side of the detection system and the amount of astigmatism introduced in the radiation beam 11. The length k of one side of the detection system square lies preferably in a range from 0.6 times k_{opt} to 1.4 times k_{opt} , where the optimum value for k , k_{opt} , is given by

$$(4) \quad k_{opt} = \frac{2(W_{22} + 1.5)\lambda}{NA_D}$$

where W_{22} is the peak-valley astigmatic wavefront deformation expressed in units of the wavelength, introduced in the reflected beam 11 and measured over the entire cross-section of the beam. The tolerance on k implies that the detector shape is not limited to a square but may be rectangular within the tolerance range. A common amount of astigmatism introduced in the beam 11 is 5λ . When NA_D is equal to 0.1 and the wavelength equal to 650 nm, the length k lies preferably between 118 μm and 51 μm with an optimum value at 85 μm .

When no astigmatism is introduced in the radiation beam 11, the upper value of the preferred range for the size k of the detection system is given by

$$(5) \quad k_{max} = 16 W_{40} \left(\frac{NA_1}{NA_0} \right)^3 \frac{\lambda}{NA_D}$$

where W_{40} is the spherical aberration due to a single pass through the thickness difference at the largest diameter of the radiation beam 11, i.e. at the numerical aperture NA_0 , and NA_1 is the numerical aperture at the inner circle of the annular part of the radiation beam 9. The term W_{40} in units of a wavelength is given by

$$(6) \quad W_{40} = \frac{(n^2 - 1)}{8n^3} \frac{\Delta d}{\lambda} (NA_0)^4$$

20

where n is the refractive index of the transparent layer and Δd the thickness difference between the layers 2 and 22. The lower value of the preferred range for k is 0.6 times k_{max} . In one of the embodiments of the objective lens without opaque ring and having an annular part extending from 0.55 to 1 times the diameter of the radiation beam, the value of

25 NA_1/NA_0 is 0.55 and the maximum size of the detection system is given by

$k_{max} = 15\lambda/NA_D$. With the above values of λ and NA_D this yields $k_{max} = 98 \mu\text{m}$ and a lower bound of 59 μm . In one of the embodiments having a ring 38 extending from 0.55 to 0.65 times the diameter of the radiation beam, the value of NA_1/NA_0 is 0.65 and the

maximum size of the detection system is given by $k_{max} = 25\lambda/NA_D$. With the above values of λ and NA_D this yields $k_{max} = 162 \mu\text{m}$ and a lower bound of $97 \mu\text{m}$. The larger allowed size of the detection system when using an opaque ring is due to the suppression by the ring of rays at the transition from the central part to the annular part.

- 5 The magnitude of the astigmatism W_{22} is preferably such that
 $1.4 k_{opt} \leq k_{max}$.

A series of experiments has been conducted to show the quality of various signals derived from the detection system when using different objective lenses in an optical scanning device. The thickness of the first transparent layer 2 of the first type of record
10 carrier was 0.6 mm and that of the second transparent layer 22 of the second type of record carrier as 1.2 mm. The numerical aperture of the entire lens was 0.6. The information signal derived from the four output signals of the four detection elements 37-40 when scanning a record carrier of the second type had about the same quality when using an objective lens without the spherical aberration compensation according to the invention and when using an
15 objective lens according to the invention. This shows that the presence of the central part in the objective lens having a spherical aberration compensation for a different substrate thickness does not noticeably influence the quality of the information signal when reading record carriers of the first type.

When reading a record carrier of the second type using an objective lens
20 without the spherical aberration compensation according to the invention the jitter in the information signal was about 8%. When using an objective lens having a spherical aberration correction in the central part according to the invention, the jitter reduced to 6%. The addition of the extra focus correction according to the second embodiment of the objective lens lowered the jitter to 5%. The jitter was also 5% when the extra focus correction was
25 replaced by an opaque ring. It is remarked that an advantageous reduction is also achieved when the ring is applied to a lens system which, over both the central part and annular part, is corrected for the spherical aberration compensating for passage of the radiation beam through the first transparent layer.

The quality of the focus error signal depends strongly on the quality of the
30 astigmatic focal lines formed by the radiation beam 11 near the detection system. The first embodiment of the objective lens when scanning a record carrier of the second type gives a substantial improvement of the quality of the focal lines compared to the focal lines using an uncorrected objective lens. The improved quality increases the capture range of the focus servo system and allows the use of larger detection elements, thereby improving the detection

when reading record carriers of the second type. It also increases the positing tolerance of the detection system 14. In a specific scanning device using an uncorrected, known objective lens a 10 μm position error of the detection system resulted in a focus offset of 2 μm . When using a corrected objective lens in the same device having the 10 μm position error, the
5 focus offset was less than 0.2 μm .

CLAIMS:

1. An objective lens for converging a radiation beam to a single best focus, the objective lens having an outer annular part which introduces a first spherical aberration in the radiation beam compensating for passage of the radiation beam through a first transparent layer having a first thickness, and a central part inside the annular part which introduces a
5 second spherical aberration in the radiation beam compensating for passage of the radiation beam through a second transparent layer having a different, second thickness.
2. Objective lens according to Claim 1, wherein the central part and the annular part of the objective lens have effective focal lengths which are substantially equal.
3. Objective lens according to Claim 1, wherein the average thickness of the
10 central part of the objective lens is such that the RMS wavefront deviation after passage through the first transparent layer has a minimum value.
4. Objective lens according to Claim 1, wherein the objective lens comprises an opaque intermediate ring arranged between the central part and the annular part.
5. An optical scanning device for scanning a first type of record carrier
15 having a first information plane and a first transparent layer of a first thickness and for scanning a second type of record carrier having a second information plane and a second transparent layer of a second thickness different from the first thickness, comprising a radiation source for generating a radiation beam and an objective lens for converging the radiation beam through one of the transparent layers to a single best focus, and in which an
20 outer annular part of the objective lens introduces a first spherical aberration compensating for passage of the radiation beam through the first transparent layer and a central part inside the annular part introduces a second spherical aberration compensating for passage of the radiation beam through the second transparent layer.
6. Optical scanning device according to Claim 5, wherein the device
25 comprises means for positioning the best focus of the radiation beam substantially on the first information layer and the paraxial focus of said radiation beam substantially on the second information layer.

2/2

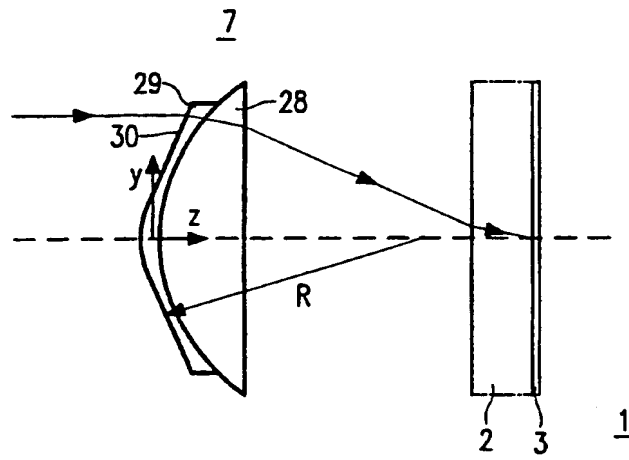


FIG. 3A

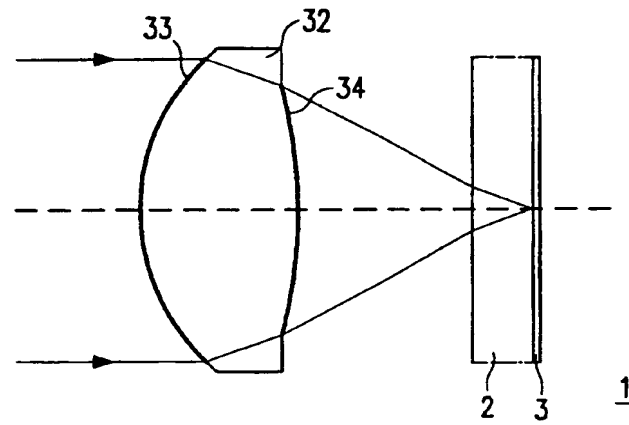


FIG. 3B




FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/00174

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G11B 7/135, G02B 13/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G11B, G02B, G02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPAT, WPI, JAPIO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5446565 A (YOSHIKI KOMMA ET AL), 29 August 1995 (29.08.95), column 27, line 57 - line 66; column 29, line 55 - line 64, figures 4A,4B,5 --	1-6
X	Patent Abstracts of Japan, Vol 18, No 587, P-1824, abstract of JP,A,6-215406 (MATSUSHITA ELECTRIC IND CO LTD), 5 August 1994 (05.08.94) --	1-6
A	EP 0457553 A2 (IOLAB CORPORATION), 21 November 1991 (21.11.91), column 5, line 46 - column 6, line 45, figures 2-4 -- -----	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 July 1997

Date of mailing of the international search report

31 -07- 1997

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Benny Andersson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/07/97

International application No.

PCT/IB 97/00174

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5446565 A	29/08/95	EP 0610055 A	10/08/94
		JP 2532818 B	11/09/96
		JP 7098431 A	11/04/95
		JP 8062493 A	08/03/96
		CN 1098508 A	08/02/95
<hr/>			
EP 0457553 A2	21/11/91	AU 662291 B	31/08/95
		AU 7649491 A	17/02/94
		NZ 238077 A	27/09/94
		US 5096285 A	17/03/92
<hr/>			

Form PCT/ISA/210 (patent family annex) (July 1992)